



YAESU DR-2X is a C4FM digital/Conventional FM dual mode and dual-Receive capable repeater that covers the VHF and UHF amateur radio bands. DR-2X incorporates the use of conventional FM communication integrated with the C4FM digital communication through its unique AMS capability.

DR-2X Features

- Modulation Modes: Conventional FM, C4FM Digital
- AMS (Automatic Mode Select) function automatically recognizes the received signal as C4FM digital or conventional FM signal
- 3.5-inch Full Color Touch panel Operation
- Extremely reliable, high RF Output Power: 50 W/20 W/5 W
- Emergency Operation: Supported by auto-switched backup battery power operation (US and Asian versions)
- Front panel microphone connector is provided for repeater transmitter testing and enables base station operation
- Advanced Operation: The rear panel Control I/O port permits connecting with the “S-COM 7330” repeater controller (Control up to three (3) DR-2X units)

DR-2X Exclusive Features:

- Dual Receive Operation
- Improved “News Station” Feature permits sharing the voice and text messages to members
- Group Monitor Feature supports easy Groupings Set-up
- Stable High Power Output with Large Heat sink
- Commercial grade components for long-term reliable operation
- IMRS (Internet-linked Multi-site Repeater System) function for simple expanded area coverage via the Internet (Option)

C4FM provides Excellent Audio Quality and Reliable Communication

C4FM modulation has better BER (Bit Error Rate) characteristics when compared to other Digital modulation systems, and guarantees reliable Communication. The YAESU C4FM digital clear voice technology uses a 12.5 kHz bandwidth which permits high quality voice communication.

FM friendly Digital with AMS (Automatic Mode Select)

System Fusion enables interconnection between all users with different modes. This is made possible in System Fusion by AMS. The AMS function automatically recognizes the signal as a C4FM digital or a conventional FM signal, then the DR-2X retransmits the signal in the preset communication mode.

Dual Receive Feature provides Flexible Operation

The unique simultaneous Dual Receive Repeater DR-2X allows the control operator to assign an additional frequency for controlling the repeater, transmitting emergency messages, or simply a second up-link frequency. The control operator may also assign separate Downlink frequencies according to the Up-link frequencies.

144/430 MHz Dual Band Dual Receive Heavy Duty C4FM/FM Digital Repeater




DR-2X
US and Asian versions
DR-2XE
European and Australian versions

Supplied Accessories: AC cable (US, Asia only), DC cable, PC connection cable SCU-20, Rubber Feet (4)

Group Monitor Feature

Yaesu's revolutionary Group Monitor feature allows tracking multiple resources quickly and efficiently by displaying the telemetry and signal strength information of the members that share the same Digital Group Identification number.

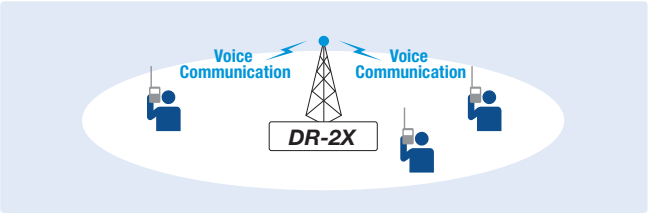

Group Monitor Image


Improved “News Station” Feature

Groups or individuals can quickly store and retrieve digital audio and text messages. The users can then access the messages on demand, any time of the day.



News Station Image

User Friendly Set-up (3.5-inch Full Color Touch Panel Display)

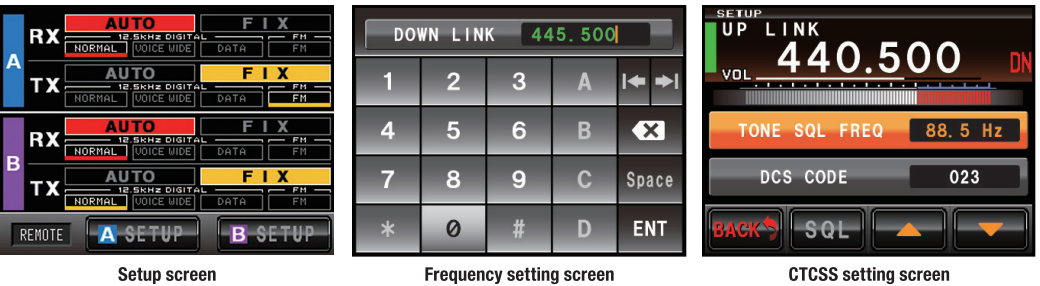


Setup screen

Frequency setting screen

CTCSS setting screen

IMRS (Internet-linked Multi-site Repeater System) for Wide Coverage Operation (Option)

The IMRS (Internet-linked Multi-site Repeater System) allows the repeater operator to link multiple repeaters over a Wide-Area-Network (WAN) or a Local-area-network (LAN). Because of the reliability shortcomings inherent with WAN (Wide Area Network) connections, such as the internet, the DR-2X incorporates direct connectivity between repeaters, permitting a variety of networking environments, and providing high quality Digital and Analog communications, even when “All Else Fails”

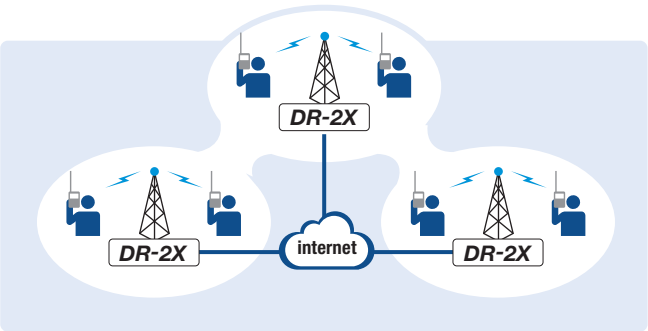

IMRS (Internet-linked Multi-site Repeater System) Image


Advanced Operation

The rear panel Control I/O port is connectable to the “S-COM 7330” repeater controller. This controller can manage up to three (3) DR-2X units, providing control of the programmable beep, the timer, access mode, and other features.


OPTIONS		
 DTMF Microphone MH-48A6JA	 Normal Microphone MH-42C6J	 Voice Guide Unit FVS-2

Other Features

- Internal AC power supply (US, Asia)
- 19" Rack Mount Capable
- High Stability ± 2.5 ppm TCXO
- DSQ (Digital Squelch Code) Signaling
- CTCSS and DCS Signaling
- ID announcement (Voice Mode: Requires FVS-2)
- Base Station Operation
- TOT (Time Out Timer)
- Firmware Updates

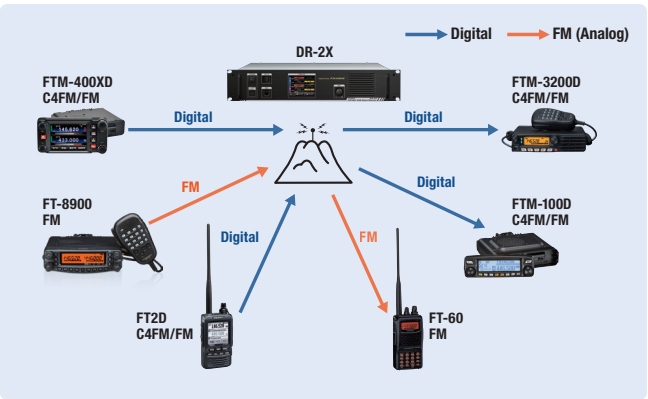

AMS Digital Repeater

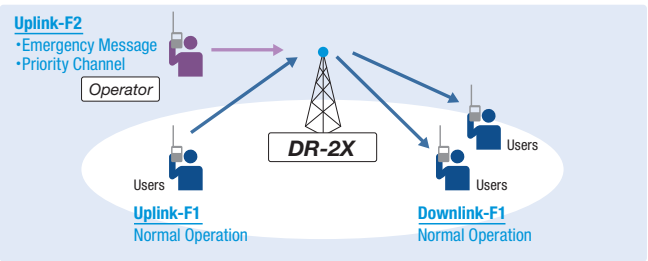

Dual Receive image